

TRUGLO®

WHEN BRIGHTNESS COUNTS®

PRODUCT: OPTIC MOUNT FOR GLOCK® PISTOLS (TG8950G1, TG8950G2)

WARNING: Serious bodily injury, death, or property damage can occur if this product is not installed and used properly.

INSTRUCTIONS:

WARNING: Confirm the firearm is unloaded and safe to handle before installation.

WARNING: This item is designed to fit only the pistol and sight models listed on the front of the packaging. Installation by a trained gunsmith is recommended.

COMPATIBILITY

TG8950G1 is intended to be used with all doublestack Glock® pattern slides and 4-post mounted optics (TRUGLO TRU•TEC™ Micro TG8100 series, Vortex® Venom, Burris® FastFire, Docter®, etc.)

TG8950G2 is intended to be used with all doublestack Glock® pattern slides and Trijicon® RMR pattern optics (TRUGLO TRU•TEC™ TG8200 Series, Trijicon® RMR™, SRO, etc). All brands and models names are referenced for compatibility purposes only. This product is not endorsed or licensed by any of these brands.

INSTALLATION

1. Remove the slide from the firearm and remove the barrel and guide rod.
2. Remove rear sight with a sight press tool, pushing the sight to the right side of the weapon (same side as ejection port). Be sure to loosen and remove any locking screws on the sight before using the press.
3. Remove all screws from the mount (using 1/16 in. and 0.50 in. hex tools). Failure to do so may damage the slide during installation.
4. Place the mount in the rear dovetail on the slide from the right side of the weapon (same side as ejection port.) Use a small amount of green Loctite™ 609 on both angled sides of the dovetail for extra security to hold the dovetail in place.
5. Continue installing the mount with a sight press tool, pushing the mount from right to left until centered on the slide. Fit is intended to be very tight; do not file or modify the mount. NOTE: Modifications to the mount will void the warranty, and may cause the mount to malfunction.
6. Tighten the dovetail lock screw (1/16 in. hex tool) to 20 in-lb (1.6 ft-lb) to help hold plate in place. Use of blue Loctite™ 242/243 is required on all threads.
7. If needed, tighten optional locking screws* for extra security or leveling (0.050 in. hex tool). Most applications do not require this. If the mount is tight and level, remove the lock screws.
8. Using the included screws, install the optic on the mount. Torque screws to 20 in-lb (1.6 ft-lb). Use of blue Loctite™ 242/243 is required on all threads. NOTE: Do not use the screws that came with your optic. **Factory screws may be too long and could damage slide.

WARNING: Optic and/or plate could come off the weapon during operation if improperly installed. Failure to follow these instructions may cause property damage, serious bodily injury, or death.

525 INTERNATIONAL PARKWAY
RICHARDSON, TEXAS 75081
P# 972.774.0300
F# 972.774.0323

WARNING: This product can expose you to chemicals including chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

ART19A29JL




TRUGLO®

WHEN BRIGHTNESS COUNTS®

PRODUCT: OPTIC MOUNT FOR GLOCK® PISTOLS (TG8950G1, TG8950G2)

WARNING: Serious bodily injury, death, or property damage can occur if this product is not installed and used properly.

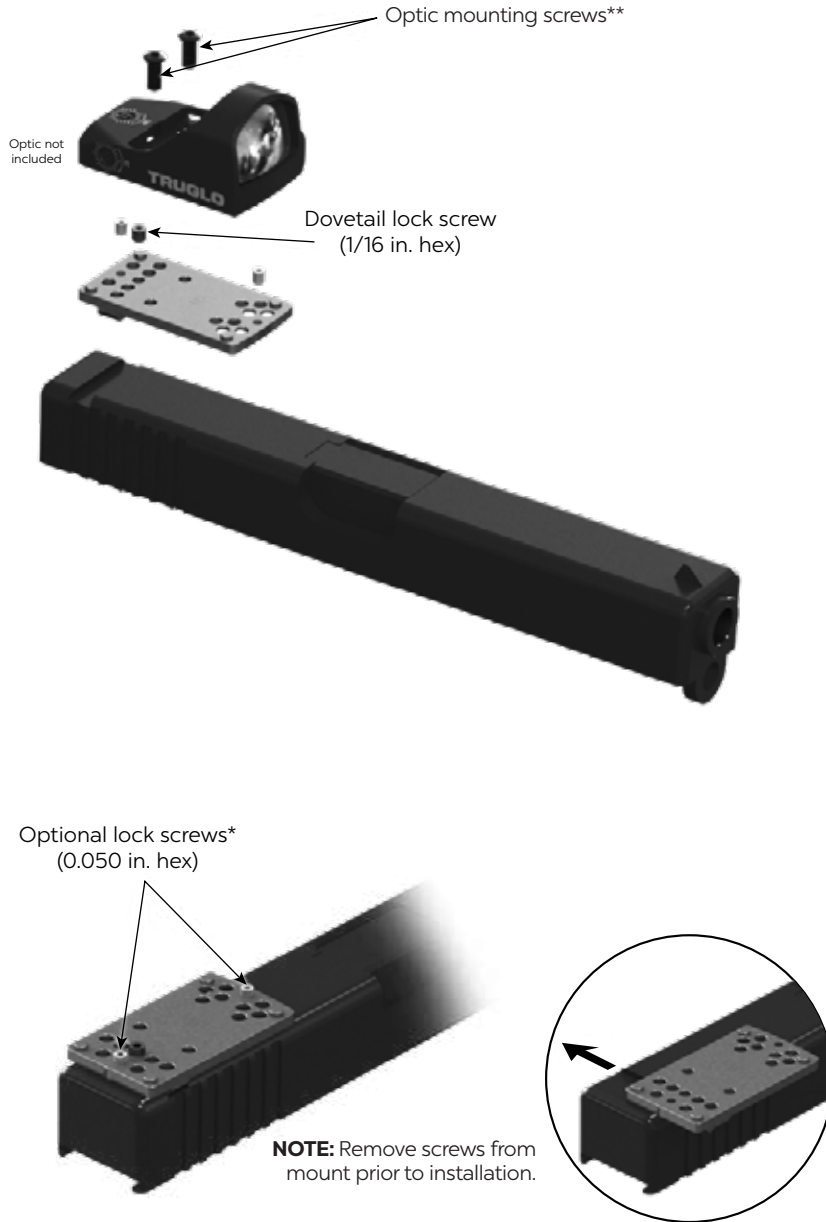

Always wear eye and ear protection when shooting firearms.

525 INTERNATIONAL PARKWAY
RICHARDSON, TEXAS 75081
P# 972.774.0300
F# 972.774.0323

WARNING: This product can expose you to chemicals including chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

ART19A29JL

